
Low Profile Deck 10000 mm [393.7"], with Extension Coupling

187 sht

Datasheet:

- Flat box-type design from high-tensile steel StE 690
- Through steel flooring on the whole loading area
- In front and at rear coupling heads for modular bogies
- Hydraulic, brake and electric lines installed within the frame, with couplings
- 2 pairs lashing rings LC 30000 daN on the coupling heads
  2 pairs bushings for screw-in lashing rings LC 20000 daN laterally of the coupling heads
  10 pairs bushings for screw-in lashing rings LC 20000 daN laterally in the outer frame
  10 pairs bushings for screw-in lashing rings LC 20000 daN on top of the outer frame including 4 units screw-in lashing rings LC 20000 daN
- Deadweight approx. 35300 lbs



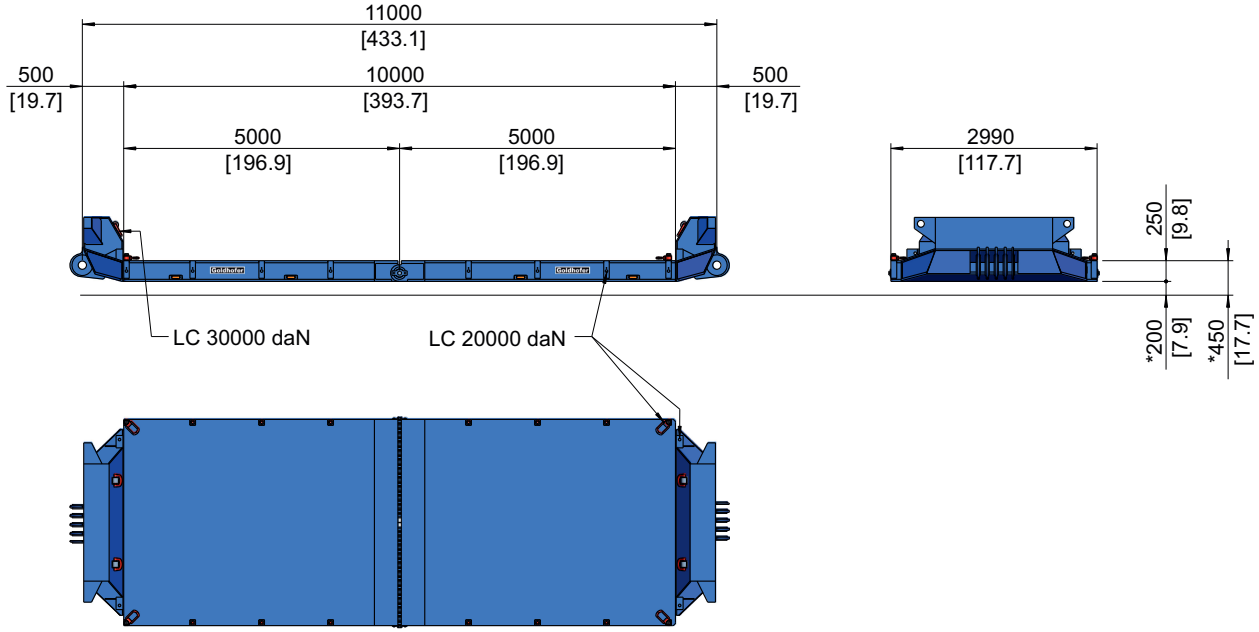

Options

Extension 3000 mm [118.1"]	10400 lbs
Extension 4000 mm [157.5"]	13000 lbs
Extension 5000 mm [196.9"]	15700 lbs

Payload	228 sht	187 sht	159 sht
In trailer combination	5+5	6+6	7+7
Payload	175 sht	151 sht	132 sht
In semitrailer combination	4+6	5+7	6+8

Remark: The given payloads are solely technical values.
They do not form a statement on legally permissible payloads.
Illustration similar, drawing not to scale.