

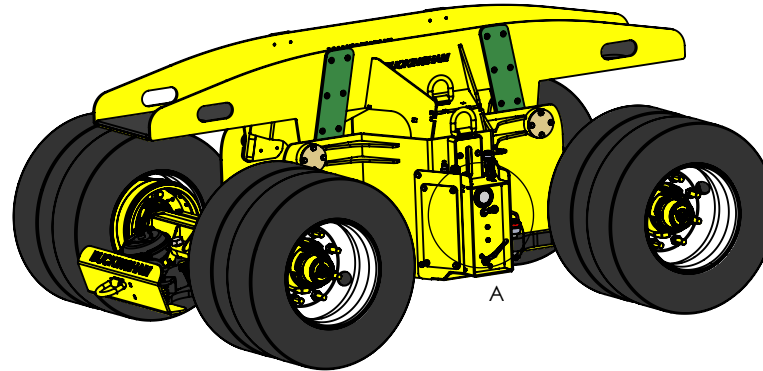


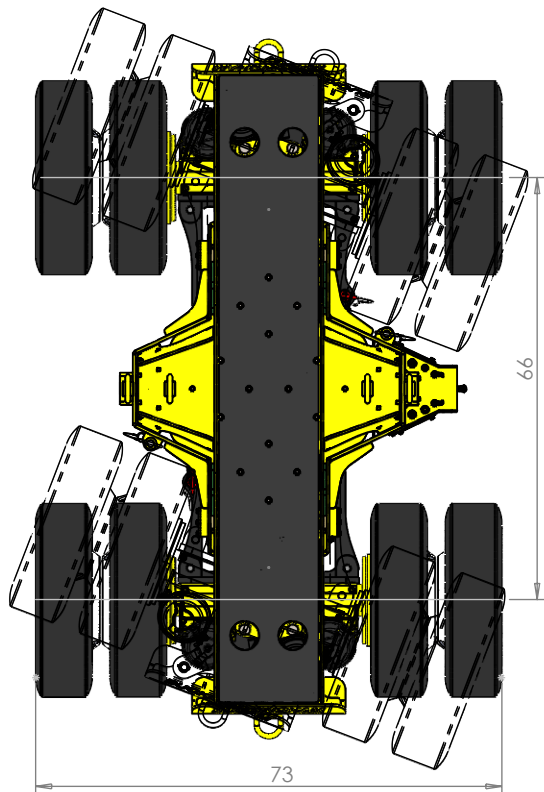


DETAIL A
SCALE 1 : 10

AIR TANK DRAIN


AIR BAG PRESSURE GAUGE

AIRBAG LIFT, LOWER, AND HOLD VALVE
ONLY SUPPLY AND SERVICE AIR LINES REQUIRED
FOR THE DOLLY

STEERING FLOAT VALVE

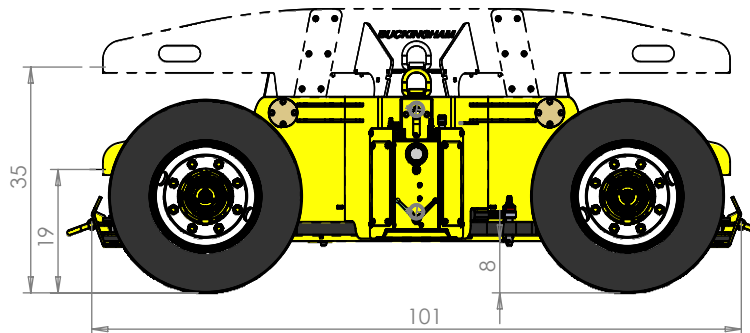

Steering Angle: 21°
Steering Cylinders: 4
Length With Bumpers: 102"
Air Bag Lift Height: 16"
Ground Clearance: 8"
Minimum Ride Height: 19"
Axle Spacing: 66 "
Unit Weight: 4,760 lbs.

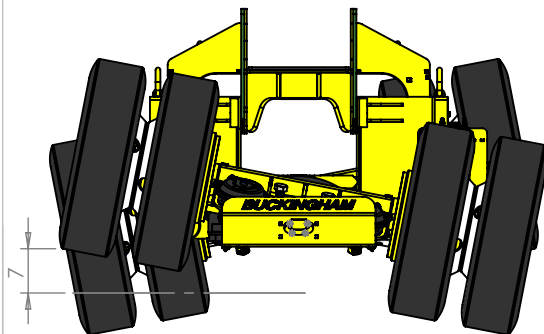

OSCILLATING AXLES

DRAWN BY:

Darin Buckingham

DATE:

4/2/2024

BUCKINGHAM

DESCRIPTION:

Crab Steer Air Ride Dolly

SIZE
A

DWG. NO.
ARDAS01D

REV
00

DO NOT SCALE DRAWING

SCALE: 1:30

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF:

BUCKINGHAM STRUCTURAL MOVING EQUIPMENT, LLC.
BERNVILLE, PA. PHONE (610)488-8969

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF BUCKINGHAM STRUCTURAL MOVING EQUIPMENT, LLC IS
PROHIBITED.